


Model- AD-900

## Duct Mounted Opposed Blade Damper with Remote Control Cable Operator

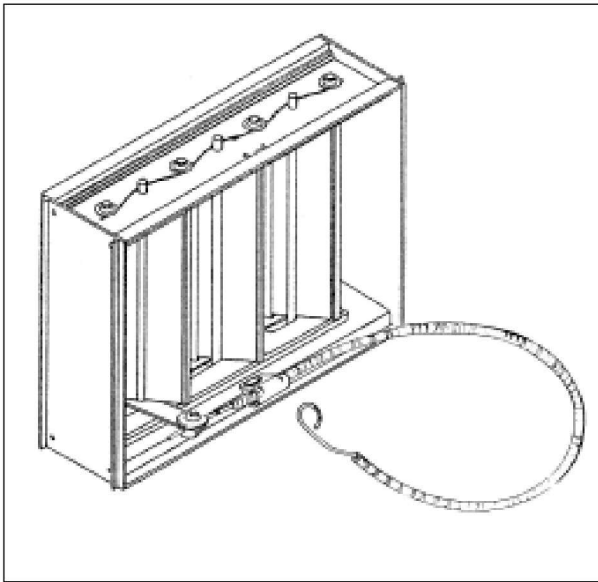

### DESCRIPTION:



1. Manufactured from heavy gauge aluminum extrusions with miscellaneous steel & brass components. Mill finish.
2. Designed to be mounted in ductwork or plenum inlets where ceilings are inaccessible.
3. Gang operated blades on 1" centers move simultaneous in opposite directions and close at 45° permitting precise metering of the air with minimal disturbance to the air pattern.
4. 3' Pre-mounted cable operator (5' available)
5. Dampers will have one cable operator per 20" in width. (ie. 24"x6" will have two cables)

Minimum Size = 6" x 4"

Maximum Size = 48" x 18"

### Std Sizes

|        |        |
|--------|--------|
| 06x04  | 16x04  |
| 06x06  | 16x05  |
| 08x04  | 16x06* |
| 08x06* | 16x08  |
| 08x08  | 16x10  |
| 10x04* | 18x04  |
| 10x05  | 18x06* |
| 10x06* | 18x08  |
| 10x08  | 18x10  |
| 10x10  | 18x12  |
| 12x04* | 20x04  |
| 12x05  | 20x06  |
| 12x06* | 20x08  |
| 12x08  | 20x10  |
| 12x10  | 24x04  |
| 12x12  | 24x06  |
| 14x04  | 24x08  |
| 14x05  | 30x06  |
| 14x06* |        |
| 14x08* |        |
| 14x10  |        |
| 14x12  |        |

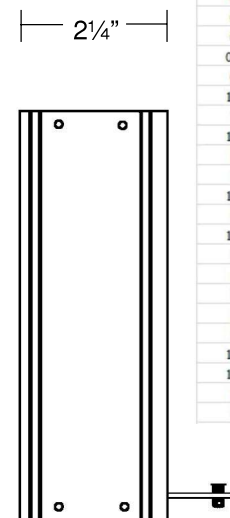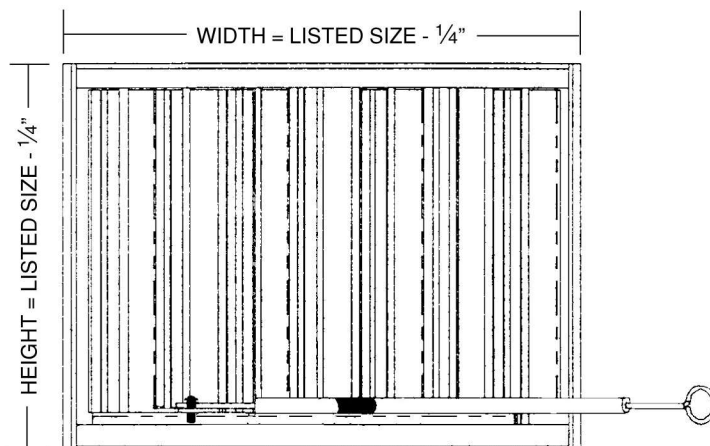

JOB NAME:  
 LOCATION:  
 CONTRACTOR:  
 ENGINEER:  
 ARCHITECT:

**SUBMITTAL DATA**